

MethaPlus®



More gas,
create smiles



MethaPlus® S/L 100

Much more power in the fermenter



What is **MethaPlus® S/L 100**?

- A highly active biocatalyst able to for increase capacity in the biogas operation
- An enzyme is able to hydrolyse plant fibers (polysaccharides such as cellulose and hemicellulose) and so makes these polysaccharides more accessible for gas-forming microorganisms
- A safe ride to higher energy and resource efficiency for improved productivity of the whole plant




How does **MethaPlus® S/L 100** work?

Countless microorganisms work in the biogas fermenter, and to create an optimum degrading performance they need energy. They obtain this energy from polysaccharides sugars that first of all have to be split by enzymes before they can be used or consumed. However, the number of enzymes occurring “naturally” in the fermenter is not enough to provide an optimum supply of sugars to the microbes.

Adding the enzyme combination **MethaPlus® S/L 100** specially developed for biogas operations provides


the microorganisms with a continuous flow of hydrolysed polysacchorides (monosaccharides and oligosaccharides) which convert them into energy.

As a result, the microorganisms multiply more quickly and the biological activity rises significantly. As well as polysaccharides, other higher-molecular substances are also increasingly converted to methane and carbon dioxide. The higher degradation rate has a number of effects; more biogas is produced and the viscosity of the contents in the fermenter is reduced. Peak loads can be accommodated in the plant due to the higher biological activity.

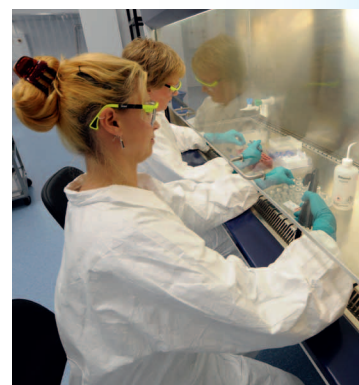

DSM – The leader in the development of enzymes in the renewable energies sector

Cleave. Convert. Produce gas!

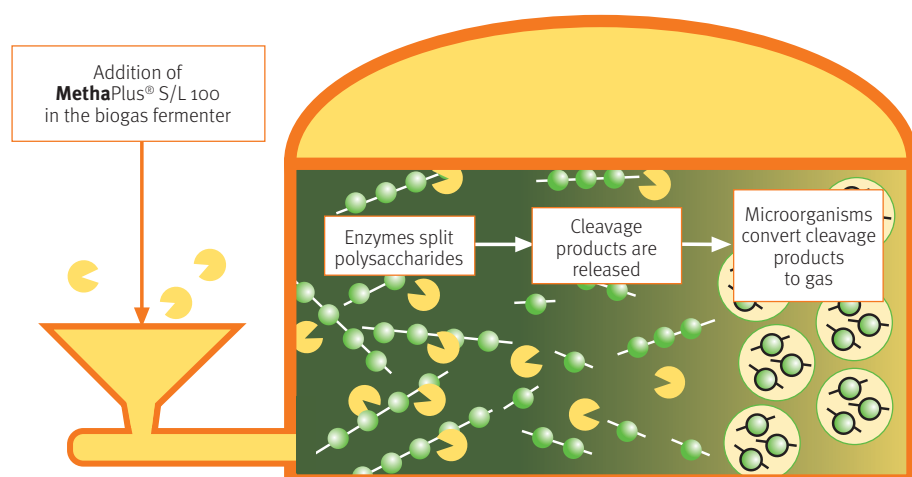

You too can benefit from the **MethaPlus®** effect

- Higher process stability
- Optimized substrate conversion
- Greater profitability

Productivity of **MethaPlus® S/L 100**

Using MethaPlus® S/L 100 in biogas plants is now based on a wealth of process data a proven method for producing Biogas. MethaPlus® S/L 100 has been successfully used in biogas plants since 2005, making it the best tested enzyme product for biogas plants that has been on the market the longest.

Optimum utilization is the key factor in the profitability of a biogas plant. Any improvement in the fermenter biology increases the efficiency and thus the profitability of a biogas plant. This is where MethaPlus® S/L 100 comes into play; its positive effects (higher biogas yield, reduction in viscosity, process stabilization) mean that your plant can run more economically.

We offer everything you need for greater efficiency

DSM offers a comprehensive tailor-made package of service analysis, advice and recommendation of additives and carefully assesses each step in optimizing your biogas plant. After each step, the subsequent steps can be adapted for optimum results.

Step by step, we provide advice for optimizing your biogas plant:

- Recording of the relevant parameters of your plant and identification of potentials
- Assessment of plant capacity (substrate consumption, gas yield, process stability), if necessary recommendations for the use of MethaPlus® S/L 100
- Sustainable measures for plant optimization (selection of substrate, use of additives)



Using **MethaPlus® S/L 100** will give you:

- Increased biogas yields and thus higher feed-in payments
- Lower viscosities to avoid/degrade digester supernatant
- Energy savings and less wear
- Maximum plant utilization
- Higher digester chamber loads
- Greater flexibility in substrate use

MethaPlus® convinces professionals in the field

The plus factor for greater security and safety

In a joint pilot trial involving WELTEC BIOPOWER GmbH and DSM Biogas, the use of MethaPlus® S/L 100 in a biogas plant (capacity: 536 kWel.) produced a 12 % rise in specific energy production (see graph). As a result, MethaPlus® S/L 100 had a sustainable effect on the efficiency of biogas production and significantly improved the productivity of the plant.



Save substrate and reduce costs

The intensified substrate hydrolysis and improved substrate conversion thanks to MethaPlus® S/L 100 made it possible to save approximately 1 tonne of organic substrate per day. Based on the fresh mass of an average corn silage with a 33 % DM content, this corresponds to a reduction of 3 tonnes of corn silage per day. With an energy production of 330 days, this means a potential saving of approx. 1,000 tonnes of corn silage a year for the plant.

Depending on corn prices, the use of MethaPlus® S/L 100 gives a cost reduction of 30,000–45,000 euros minus the enzyme costs (see graph).

Earn more by improved substrate utilization

The improved utilization of substrate thanks to MethaPlus® S/L 100 also reduces the daily fermentation residue produced by approximately 2.2 m³ per day. Setting 3 euros/m³ according to a guide value proposed by the NRW Chamber of Agriculture for disposal (spread application or discharge) means additional savings for a biogas plant of the corresponding size of approximately 7 euros a day.

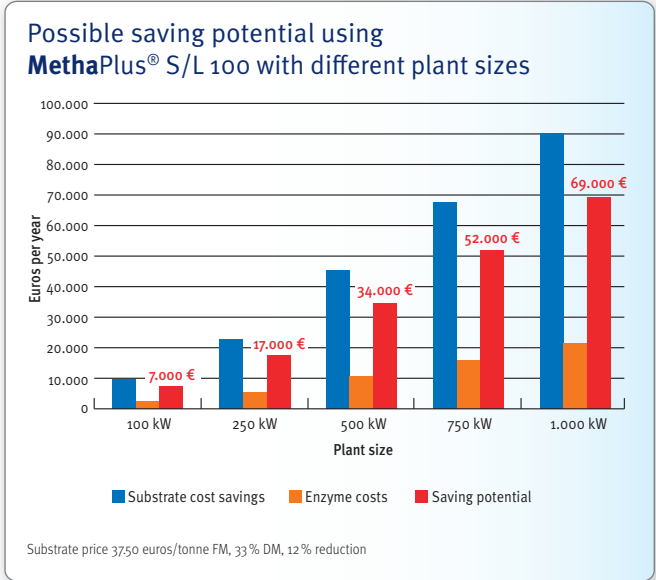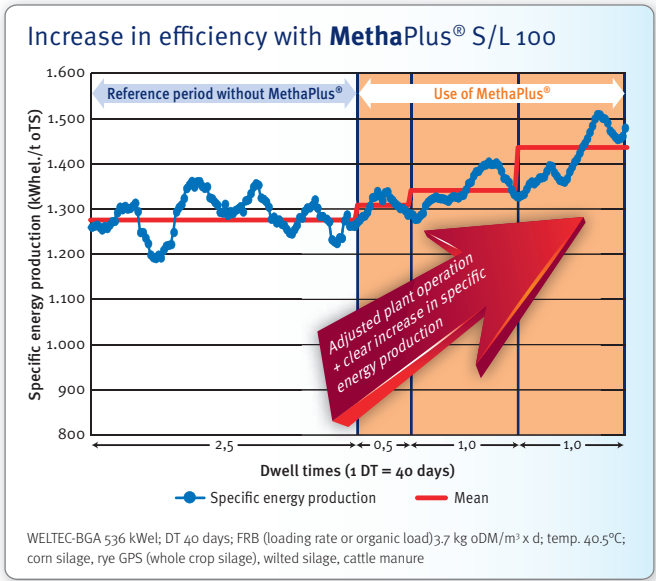

DSM Biogas

Further information can be obtained from:

www.dsmbiogas.com

or

Europe

DSM Biogas

Visitors address:

Alexander Fleminglaan 1

2613 AX, Delft

The Netherlands

Mail address:

P. O. Box 425

2600 AK, Delft

The Netherlands

tel.: +31 15-279 25 04

e-mail: info.biogas@dsm.com

Trade Register: 140 44 796

Germany

DSM Biogas

tel.: +49 211-975 49 94

e-mail: info.biogas@dsm.com

Sales partner

DISCLAIMER

Although diligent care has been used to ensure that the information provided herein is accurate, nothing contained herein can be construed to imply any representation or warranty for which we assume legal responsibility, including without limitation any warranties as to the accuracy, currency or completeness of this information or of non-infringement of third party intellectual property rights. The content of this document is subject to change without further notice. Please contact us for the latest version of this document or for further information. Since the user's product formulations, specific use applications and conditions of use are beyond our control, we make no warranty or representation regarding the results which may be obtained by the user. It shall be the responsibility of the user to determine the suitability of our products for the user's specific purposes and the legal status for the user's intended use of our products.

© DSM 2011

Version 11.001